




TAPER TYPE		KEY TYPE	
<p>SEC. X-X'</p> <p>M10 P1,25 유호길이 10</p> <p>Taper 1/10</p> <p>40 12 25 5⁰_{-0.03} 16⁰_{-0.018} 4 3⁰_{-0.1}</p>	<p>40 6 3.5 9 16⁰_{-0.018}</p>		

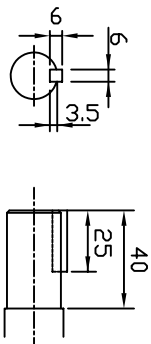


MS3102A20-4P
Motor Cable
Connector 접속도

Lead Wire 신호선	PIN 번호
U	A
V	B
W	C
Ground	D



MS3102A20-29P
Encoder Cable
Connector 접속도

Encoder Pin	PIN	Encoder Pin	PIN
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

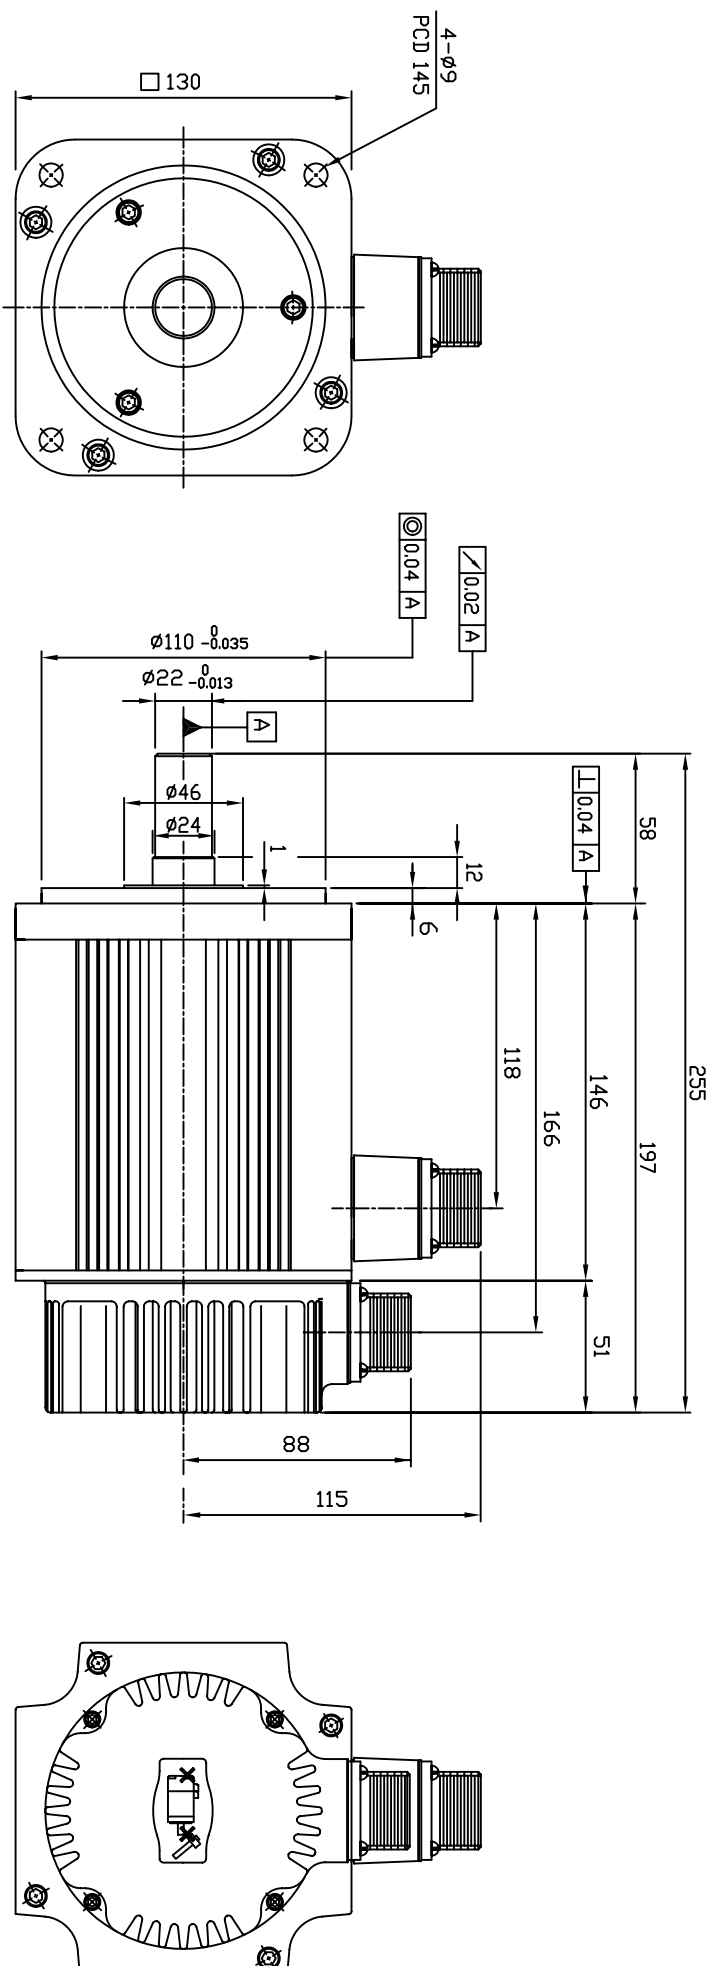

1. 100% -- 8.5Kg

상 각 별	단 위	mm	척 도	N / S	영	FMACN22-AB00
제 도	설 계	검 도	승 인		칭	N130C(표준 TYPE)
2008.05.21	J.JUSED	2008.05.21	IKIKIM	2008.05.21	C.CHOT	
HIDEN					관계도번	도