





TAPER TYPE		KEY TYPE	
<p>SEC. X-X'</p> <p>Taper 1/10</p> <p>M10 P1,25 유호길이 10</p> <p>40 12 25 4</p> <p>5.0<sup>+0.03</sup><sub>0</sub> 5.0<sup>+0.03</sup><sub>0</sub> 4.3<sup>+0</sup><sub>-0.1</sub></p>	<p>40 25 6 3.5 9</p>		



Lead Wire 신호선	PIN 핀호
U	A
V	B
W	C
Ground	D



Encoder Pin	PIN	Encoder Pin	PIN
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

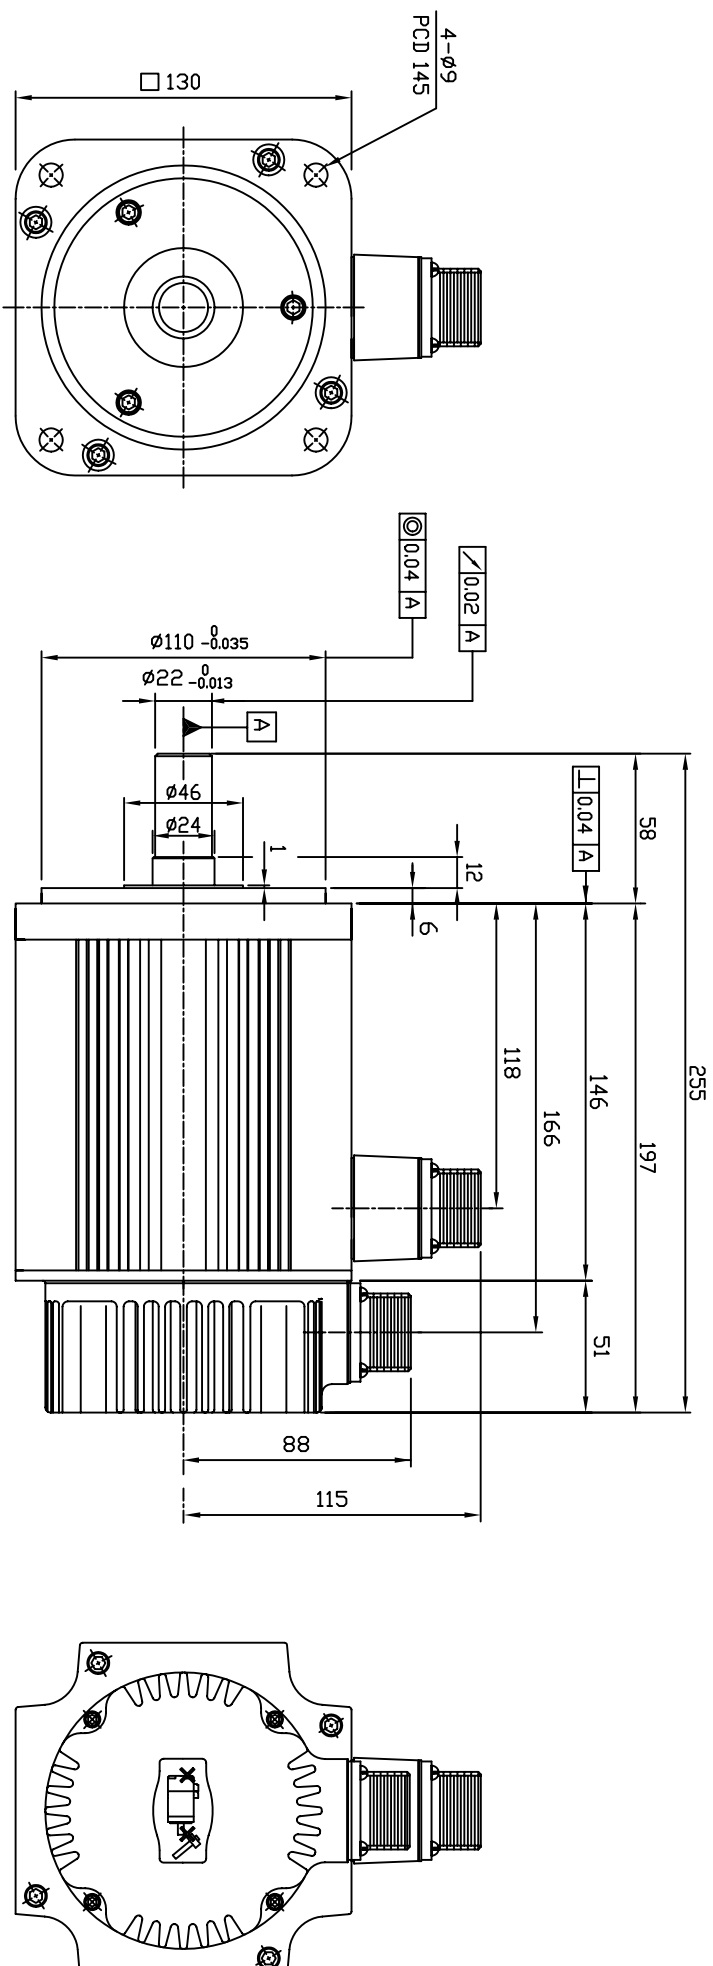

검 각 법	단 위	mm	작 도	N / S	명	FMAKN16-AB00
계 도	실 계	검 도	승 인			
2008.05.21 JUSEO		2008.05.21 IKKIM	2008.05.21 C.CHOI			
					칭	N130C(표준 TYPE)

# INDEX

FMANK16-AB00

N130(표준 TYPE)