






TAPER TYPE		KEY TYPE	
<p>SEC. X-X'</p> <p>4.3^{+0/-0.1}</p> <p>5^{+0/-0.03}</p> <p>5^{+0/-0.03}</p> <p>M10 P1,25</p> <p>유호길이 10</p> <p>Taper 1/10</p> <p>12 25 40</p> <p>4</p> <p>16^{+0.018/0}</p> <p>19^{+0.018/0}</p> <p>X</p>	<p>6 3.5 9 40</p> <p>M10 P1,25</p> <p>유호길이 10</p> <p>Taper 1/10</p> <p>16^{+0.018/0}</p> <p>19^{+0.018/0}</p> <p>X</p>		



Lead Wire 상표시	PIN 번호
U	A
V	B
W	C
Ground	D



Encoder 신호	PIN 번호	Encoder 신호	PIN 번호
A	A	U	K
\bar{A}	B	\bar{U}	L
B	C	V	M
\bar{B}	D	\bar{V}	N
Z	E	W	P
\bar{Z}	F	\bar{W}	R
0V	G	SHIELD	J
+5V	H		

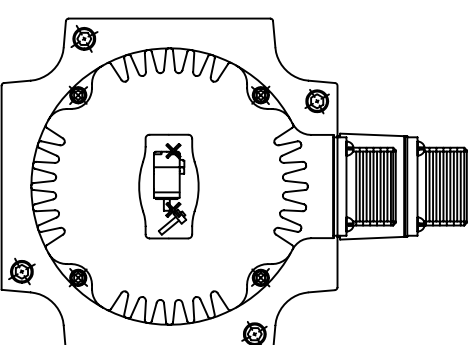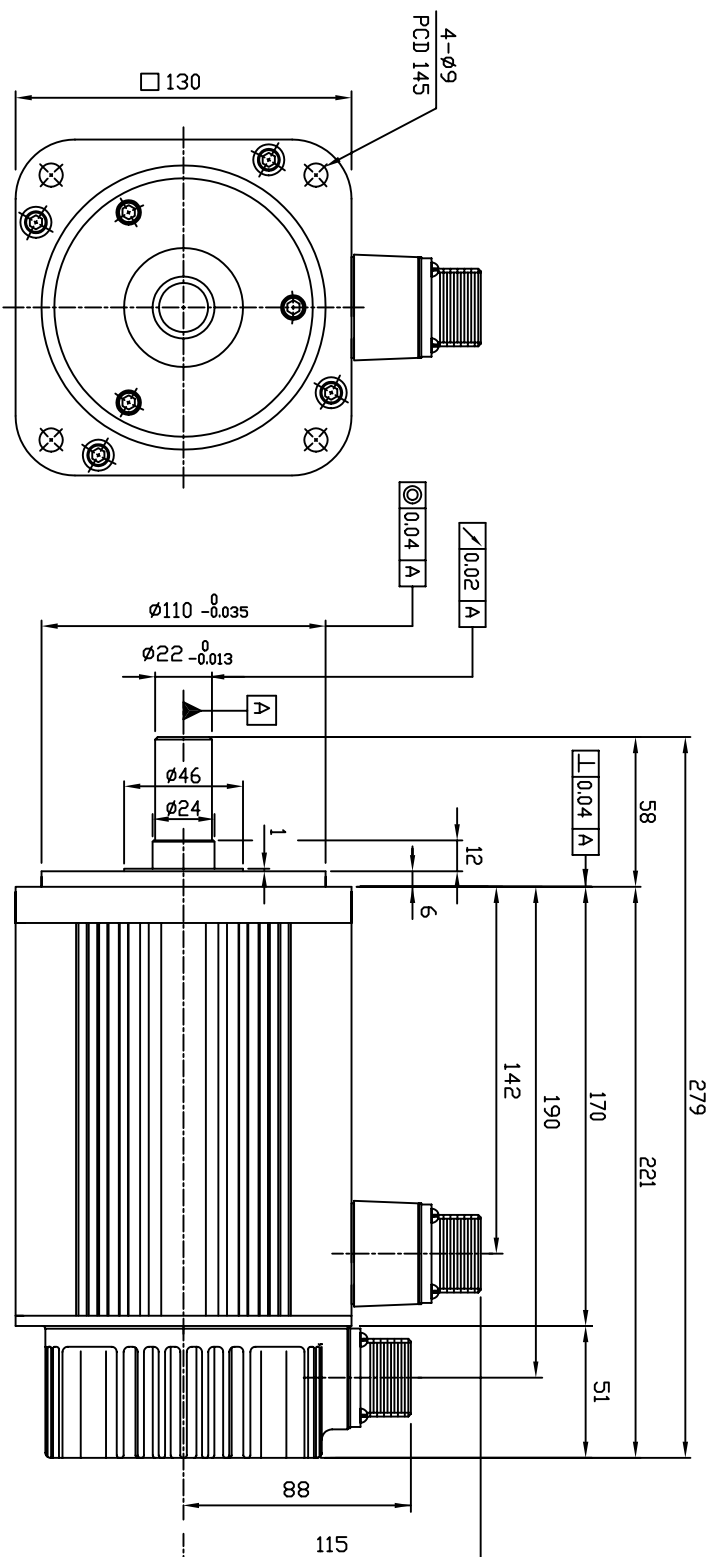

1. $\mu_0 = 10\text{Kg}$

상 각 별		단 위		mm		척 도		N S	영	FMANKN22-AB00 N130C(표준 TYPE)	
제 도		설 계		검 도		승 인					
2008.05.21 J.J.SED				2008.05.21 IKKIM		2008.05.21 C.CHOI		인			
				관계도판			도				
							판				
HIDEN											