




TAPER TYPE		KEY TYPE	
<p>40 12 25 4 5 3 Taper 1/10 M10 P1,25 유호길이 10 X 16 $\begin{smallmatrix} +0.018 \\ -0.013 \end{smallmatrix}$</p>	<p>40 12 25 4 5 3 Taper 1/10 M10 P1,25 유호길이 10 X 16 $\begin{smallmatrix} +0.018 \\ -0.013 \end{smallmatrix}$</p>		




Motor Cable
Connector 접속도

Lead Wire 상표시	PIN 번호
U	A
V	B
W	C
Ground	D



MS3102A20-29P
Encoder Cable
Connector 접속도

Encoder 신호	PIN 번호	Encoder 신호	PIN 번호
A	A	U	K
\bar{A}	B	\bar{U}	L
B	C	V	M
\bar{B}	D	\bar{V}	N
Z	E	W	P
\bar{Z}	F	\bar{W}	R
0V	G	SHIELD	J
+5V	H		

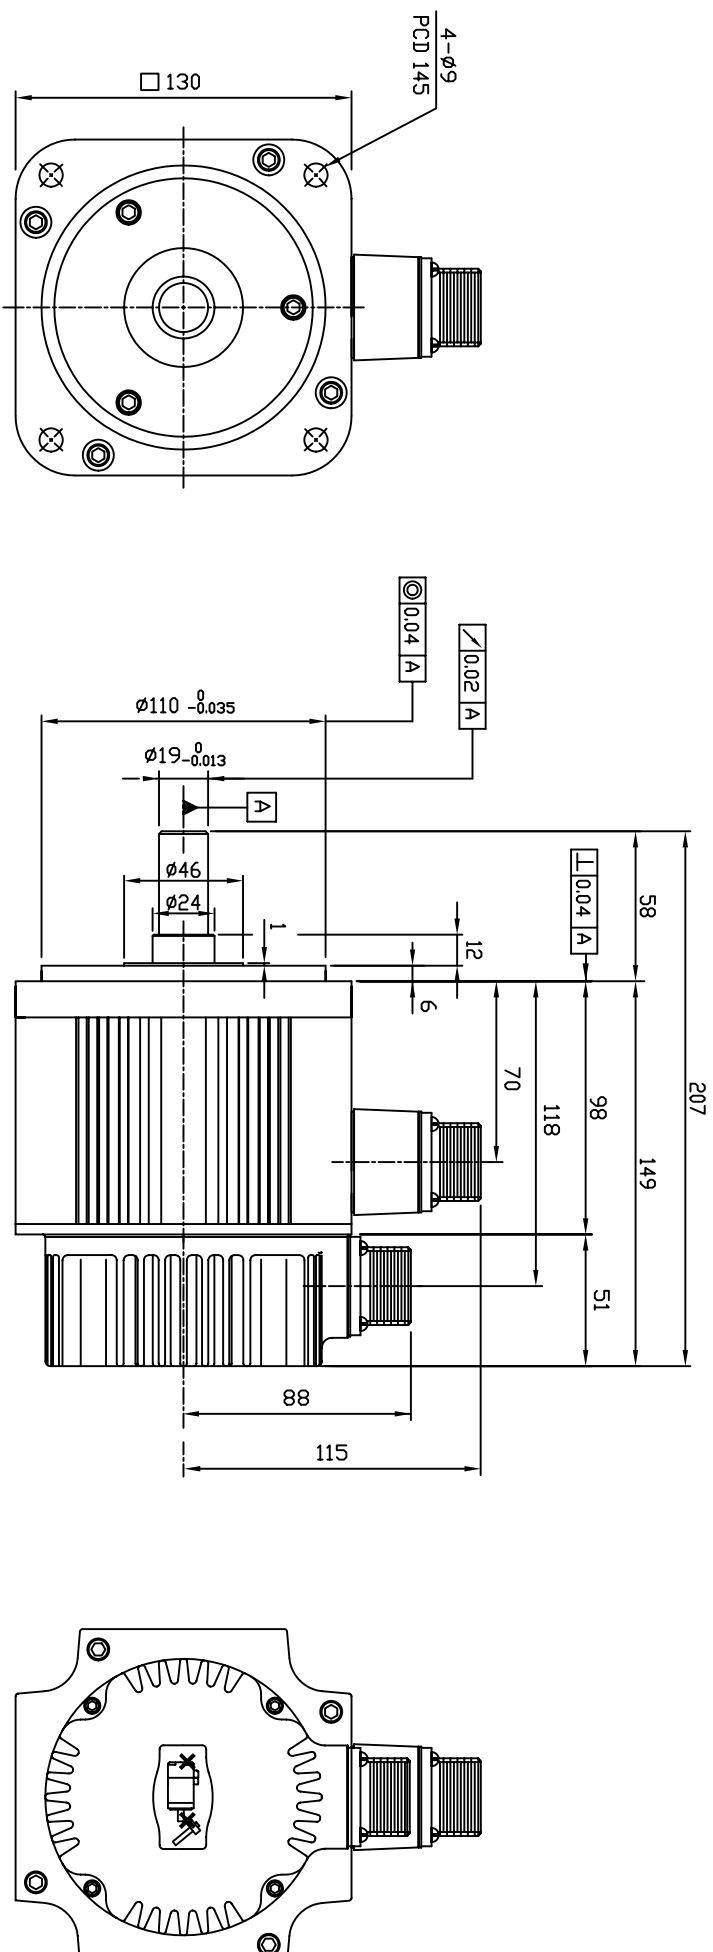

1. $5.5 \times 10^5 \text{ g}$

상 각 별	단 위	mm	척 도	N / S	영	FMATN05-AB00	
제 도	설 계	검 도	승 인		원	N130<표준 TYPE>	
2008.05.21		2008.05.21	2008.05.21				
JUSSED		IKKIM	C. CHOI				
HIDEN		관계도반		도	반	/	