






TAPER TYPE		KEY TYPE	
<p>SEC. X-X'</p> <p>4.3⁺⁰_{-0.1}</p> <p>5⁺⁰_{-0.03}</p> <p>5⁺⁰_{-0.03}</p> <p>M10 P1,25</p> <p>유호길이 10</p> <p>Taper 1/10</p> <p>12 25</p> <p>40</p> <p>4</p> <p>16⁺⁰_{-0.018}</p> <p>X</p>	<p>6</p> <p>3.5</p> <p>40</p> <p>25</p>	<p>6</p> <p>3.5</p> <p>40</p> <p>25</p>	<p>6</p> <p>3.5</p> <p>40</p> <p>25</p>

Motor Cable
Connector 접속도

Lead Wire 선번호	PIN 번호
U	A
V	B
W	C
Ground	D

Encoder Cable
Connector 접속도

Encoder Pin	PIN	Encoder Pin	PIN
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

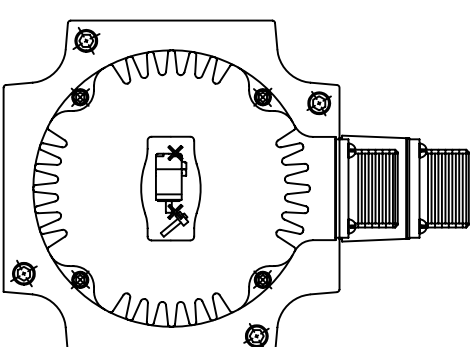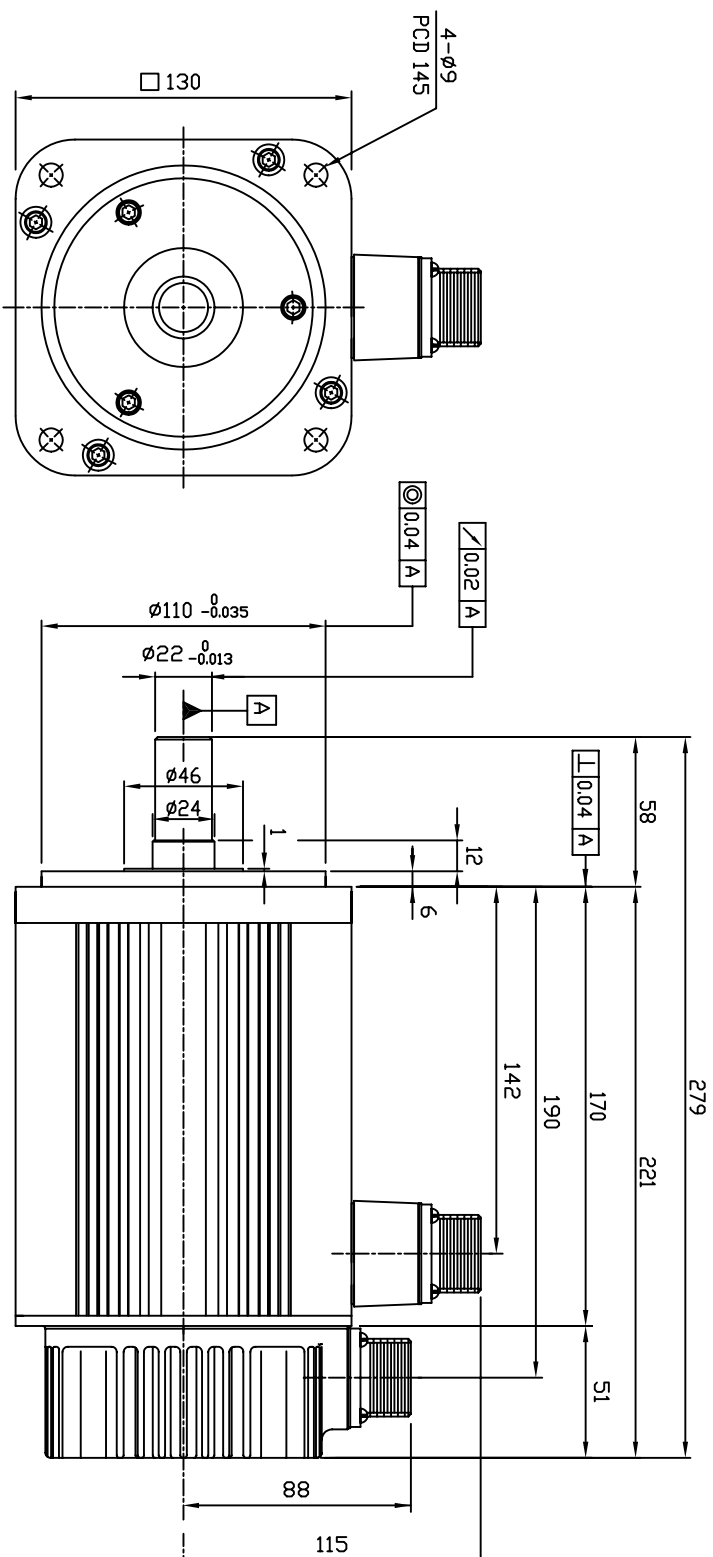

1. $\mu_0 = 10\text{Kg}$

상 각 별		단 위	mm		척 도	N / S	명	FMATN17-AB00
제 도	설 계	검 도	승 인					
2008.05.21	2008.05.21	2008.05.21	2008.05.21	친	N130(표준 TYPE)			
JJSEDO	JKKIM	C. CHOI						
관계도판			도	판				
HIDDEN				✓				