





TAPER TYPE		KEY TYPE	
<p>SEC. X-X'</p> <p>5^{+0/-0.03}</p> <p>5^{+0/-0.03}</p> <p>4.3^{+0/-0.1}</p> <p>4</p> <p>M10 P1,25</p> <p>우호길이 10</p> <p>40</p> <p>12 25</p> <p>4</p> <p>Taper 1/10</p> <p>16^{+0.018/-0.018}</p> <p>X</p>	<p>6</p> <p>9</p> <p>3.5</p> <p>40</p> <p>25</p>		





MS3102A20-4P
Motor Cable
Connector 접속도

Lead Wire 선표시	PIN 번호
U	A
V	B
W	C
Ground	D



MS3102A20-29P
Encoder Cable
Connector 접속도

Encoder 位址	PIN 位址	Encoder 位址	PIN 位址
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

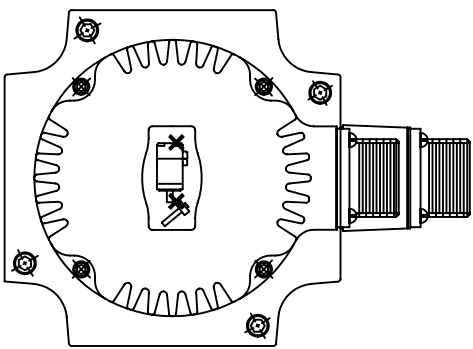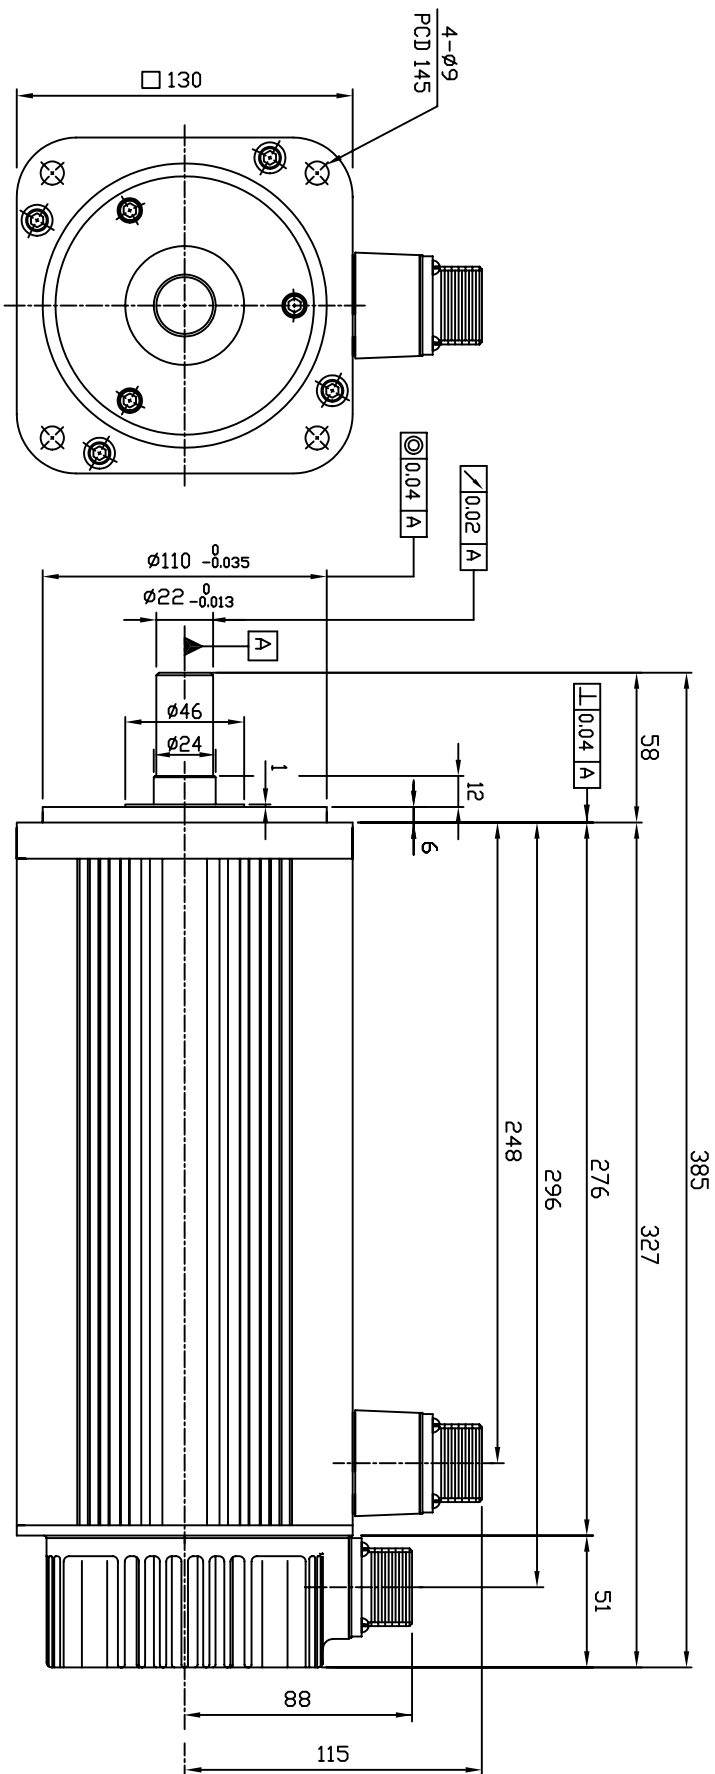

1. $K_{50} = 15.8 \text{ kg}$

상 각 법	단 위	mm	척 도	N / S	영	FMAKF15-AB00
제 도	설 계	검 도	승 인			
2008.05.21 J.J.SED		2008.05.21 I.K.KIM	2008.05.21 C.CHOI			
HIDEN				친		
도						F130(표준 TYPE)