




TAPER TYPE		축 단 상 세 도	
<p>SEC. X-X'</p> <p>M10 P1.25 유표길이 10</p> <p>Taper 1/10</p> <p>40 12 25 4 16_{0.018} X 5_{0.03} 4.3_{0.1}</p>	<p>40 12 25 4 16_{0.018} X 5_{0.03} 4.3_{0.1}</p>	<p>40 12 25 4 16_{0.018} X 5_{0.03} 4.3_{0.1}</p>	<p>40 12 25 4 16_{0.018} X 5_{0.03} 4.3_{0.1}</p>
KEY TYPE			





Lead Wire 선비	PIN 핀호
U	A
W	B
V	C
Ground	D
Brake +	E
Brake -	F



Lead Wire 선비	PIN 핀호
U	A
W	B
V	C
Ground	D
Brake +	E
Brake -	F

Encoder Pin	Encoder Pin	Encoder Pin	Encoder Pin
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

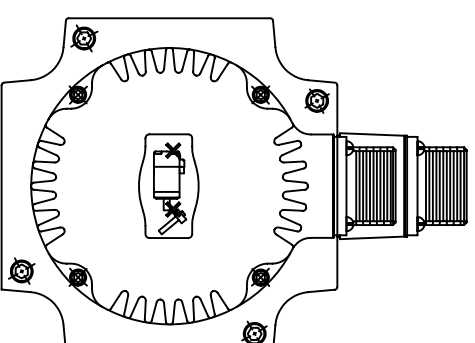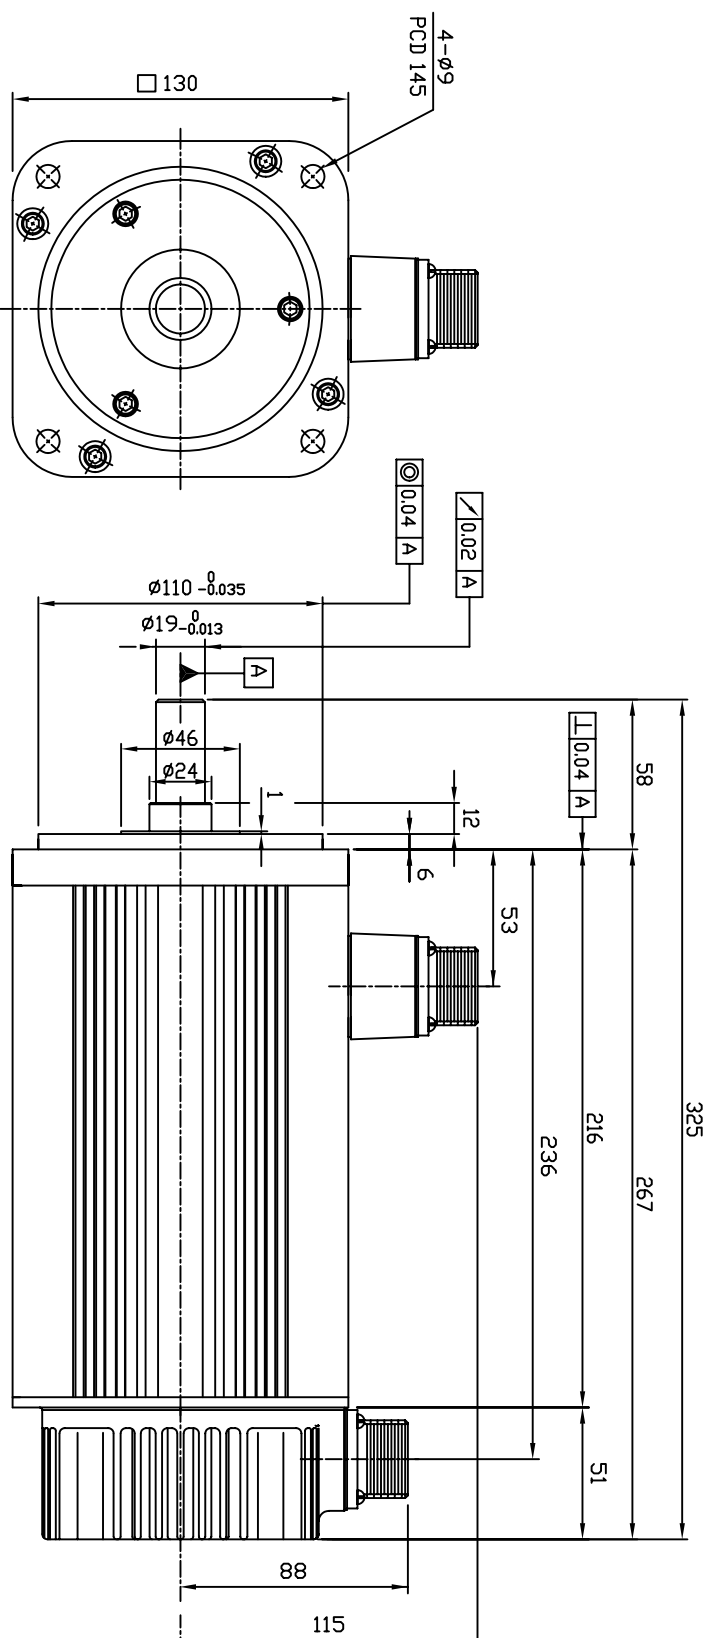

1. 브레이크 입력전원은 표준:DC90[V],특주:24[V]를 확인후 사용할 것.
2. 중량 : 11Kg

상 각 별	단 위	mm	척 도	N S	영	FMAKF08-AB10
제 도	설 계	검 도	승 인			
2008.05.21		2008.05.21	2008.05.21		청	F130(BRAKE TYPE)
JUSED		IKKIM	C.CHOI			
HIDEN				관계도번	도 번	/